

# Professional Level 16 Channel NVR 1U LTN3216E-P16




## Key Features:

- Support the connected camera at up to 6MP resolution
- VGA output at up to 1080P and HDMI output up to 4K (3840×2160) resolution
- 2 SATA hard disks can be connected with up to 8TB capacity for each
- 1-ch face search or 2-ch intrusion detection up to 1080P

## Rear Panel:

- |                  |                           |
|------------------|---------------------------|
| 1. PoE           | 5. HDMI Interface         |
| 2. Audio In      | 6. LAN Network Interfaces |
| 3. Audio Out     | 7. USB Interface          |
| 4. VGA Interface | 8. DC 110V~220V           |
|                  | 9. Power Switch           |

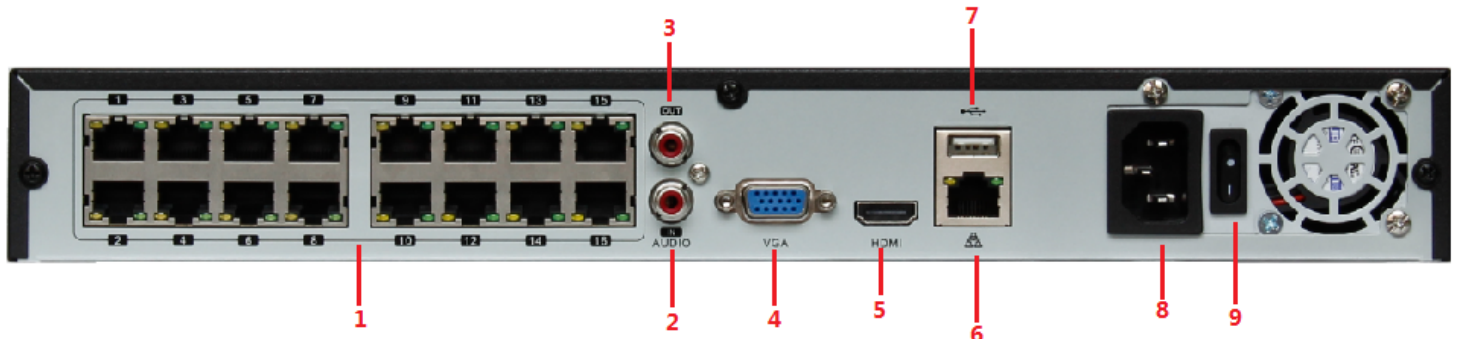

# Professional Level 16 Channel NVR 1U

## LTN3216E-P16

Video/Audio Input	
IP Video Input	16- ch
Two-way audio input	1- ch, RCA ( Line in, 2.0 Vp-p, 1kΩ)
Network	
Incoming bandwidth	192 Mbps
Outgoing bandwidth	192Mbps
Video/Audio Output	
Recording resolution	6MP/5MP/4MP/3MP/1080p/UXGA/720p/VGA/4CIF
VGA output	1-ch,1920 × 1080p/60Hz,1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz,
HDMI output	1-ch, 3840 × 2160, 1920 × 1080,1280 × 1024,1280 × 720,1024 × 768
Audio output	1- ch, RCA (Line in, 2Vp-p, 300Ω)
Decoding	
Decoding format	H.265/H.264
Recording resolution	6MP/5MP/4MP/3MP/1080p/UXGA/720p/VGA/4CIF
Synchronous playback	16-ch
Capability	16ch 1080P@30fps
Hard Disk	
SATA	2 SATA interfaces
Capacity	Up to 8TB for each disk
External Interface	
Network Interface	1 RJ-45 10/100/1000 Mbps self-adaptive Ethernet interfaces
USB Interface	2 × USB 2.0
PoE	
Interface	16-ch, RJ-45 10/100/1000 Mbps self-adaptive Ethernet interfaces
Max. Power	≥ 180W
Supported standard	IEEE 802.3af
GENERAL	
Power Supply	DC 110V~220V±10% 47Hz~63Hz
Consumption	≥ 20 W
Working Temperature	32° F - 131° F(0° C ~ +55° C)
Working Humidity	10% - 90%
Casing	1U chassis
Dimensions (WxDxH)	14.2"× 12.2" × 1.9"(360 × 311 × 48mm)
Weight	≤ 6.6lb ( 3Kg)