


# 4.0MP Network Matrix IR Turret Camera CMIP3542



## Key Features:

- 4.0MP @20fps high resolution, 3M/1080P real-time video output
- Dual stream support (Stream rate: 1-6M, Default)
- 3.6mm IR Lens, 24Pcs IR LEDs, 15M IR Range
- ONVIF Profile S and Milestone Support, SDK available
- True Day/ Night Operation: IR Cut Filter (ICR)
- Storage: NVR, Software Platform
- Support H.265 and H.264
- Power Supply: DC12V±10%, PoE (Optional)

## Dimensions:

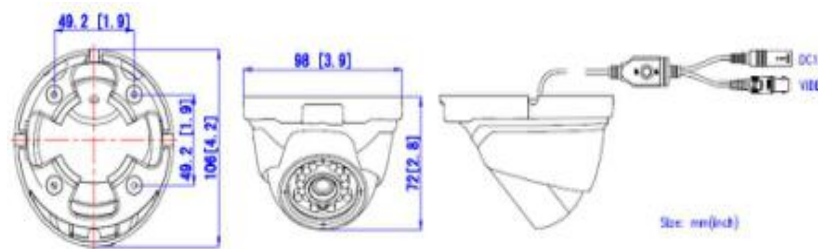

# 4.0MP Network MatrixIR Turret Camera

## CMIP3542

CAMERA	
IP Rating	IP65
Filter	Removable IR Cut Filter
Image Sensor	Progressive Scan CMOS
Lens	3.6mm IR Lens
Resolution	2592(H)×1520(V)
Electronic Shutter	NTSC:1/60-1/100,000s PAL:1/50-1/100,000s
Min Illumination	0Lux
Available IR Range	15M(49.2ft)
Compression Standard	
Video Compression	H.264 / H.265
Transmission Stream Rate	Dual Stream ( Code Rate:1M~6M , Default Code Rate:4M )
Frame Rate	Main Stream : 1~25fps ( PAL ) ,1~30fps ( NTSC ) Sub Stream : 1~25fps ( PAL ) ,1~30fps ( NTSC )
Audio Compression	/
External Interface	
Network Interface	RJ45*1 10M/100M
Network	
Alarm Trigger	Motion detection, Network dis connect, IP address conflict
Protocols	TCP/IP, UDP, SMTP, PPPoE, DDNS, SNTP, DHCP, FTP, uPnP,RTSP,HTTPS,IPv6 TCP/IP, UDP, SMTP, PPPoE, DDNS, SNTP, DHCP, FTP, uPnP,RTSP,HTTPS,IPv6
Network Support	ONVIF Profile S , SDK , Milestone
Function	
Image Setting	Contrast, Brightness, Sharpness, Saturation
Storage	NVR, Software Platform
Video Type	Manual, Timing, Motion Detection, Alarm Video
Alarm Triggers	Motion Detection
Alarm Event	Snapshot, Video, Alarm Output, Email Upload, PTZ Drive
System/Explorer Support	Windows XP, Windows 7, IE7.0 and above
General Function	Flashing, WDR, DNR, Mirror, Watermark Overlay
Image Setting	Contrast, Brightness, Sharpness, Saturation
General	
Power Supply	DC12V±10% , POE(Optional)
Current Consumption	260mA (Max.)
Dimension	Φ93×75mm ( 3.66" ×2.95" )
Weight	330g (27.86oz.)
Storage Temperature	-30 ~ +60°C
Operating Temperature	-30 ~ +45°C